


LUMI G5

Ergonomic wireless gaming mouse with charging dock

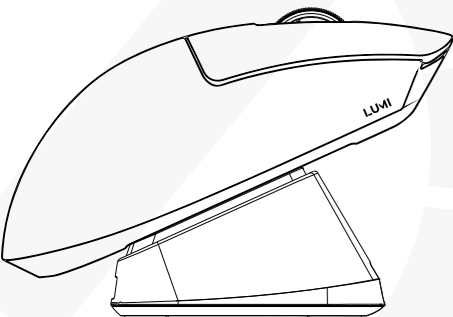

INSTRUCTION MANUAL

WELCOME TO MOXANIC

MOXANIC diciptakan dengan pendekatan yang berfokus pada kualitas, ketelitian, dan konsistensi. Setiap detail dirancang dengan tujuan yang jelas untuk menghadirkan pengalaman yang solid, relevan, dan dapat diandalkan.

Kami percaya bahwa hal-hal yang dirancang dengan baik akan terasa natural saat digunakan. Tanpa perlu penjelasan berlebihan, MOXANIC hadir sebagai bagian yang menyatu dalam keseharian.

INTRODUCTION



Thank you for choosing MOXANIC LUMI G5. This product is designed to provide a balance of performance, comfort, and usage flexibility across various scenarios. LUMI G5 supports three connection modes (Wired, 2.4G, and Bluetooth) and is equipped with a responsive control system to ensure a stable and precise user experience. With its compact design, ultra-light-weight build (approx. 65.5g), and integrated supporting features, LUMI G5 is built for comfortable long-term use.

This guide contains information on functions, settings, and safe usage of the device. Please read this manual carefully before use to ensure optimal performance and durability.

SPECIFICATION

SPECIFICATION	MOXANIC LUMI G5
SIZE / DIMENSIONS (LxWxH)	130 x 74.8 x 42.5 mm
SHELL MATERIAL	ABS
SENSOR	PixArt PAW3311
MCU	Broadcom BK3633
TRACKING SPEED	400 IPS
ACCELERATION	40G
MAX DPI	Adjustable up to 24,000 DPI
WEIGHT	±65.5 g
MICRO SWITCH	80 million clicks lifespan
SCROLL ENCODER	300,000 cycles lifespan
CONNECTIVITY	Wired (USB Type-C) / 2.4G Wireless / Bluetooth
POLLING RATE	Up to 1000 Hz (Wired & 2.4G)
BLUETOOTH POLLING RATE	133 Hz
BATTERY CAPACITY	300 mAh
RGB LIGHTING	Supported

BUTTON FUNCTION DESCRIPTION

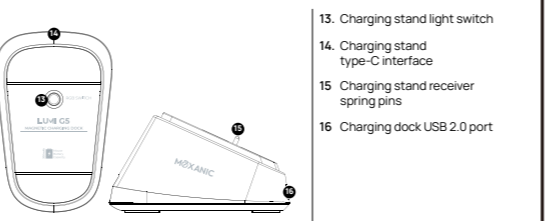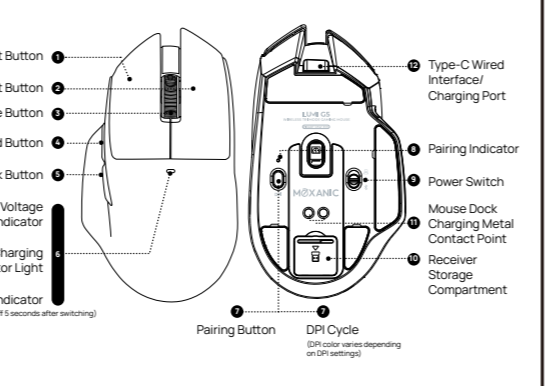

NOTES:

Sleep Mode

- **Light Sleep:** The mouse enters light sleep mode after 30 seconds of inactivity.
- **Deep Sleep:** The mouse enters deep sleep mode after 10 minutes of inactivity.
- **Customization:** This duration can be adjusted within the driver software.

Sleep Wake Up Method

- **Wake-up Method:** The mouse uses "Motion Wake-up," meaning it wakes up immediately when moved.
- **Note:** Although some deep sleep standards usually require a button press, the LUMI G5 specifically supports motion as the primary wake-up method.

Charging & Battery Indicators

- **Charging:** The DPI indicator (marked as "6" in the diagram) will show a bright pink light while charging.
- **Full Charge:** The indicator will turn bright green once the battery is fully charged.
- **Low Voltage:** The indicator will flash red to alert you when the battery is low.

CONNECTION MODE

Bluetooth Connection Method:

- Switch Mode:** Move the power switch to the Bluetooth (BT) position (Down). The mode indicator will show a blue light.
- Pairing:** Press and hold the bottom "7" button for approximately 3 seconds. The indicator will flash blue rapidly to signal pairing mode.
- Connect:** On your device (PC/Phone), search for "LUMI G5" and select it to connect.
- Success:** Once connected, the pairing indicator will stay blue for 1 second and then turn off.

Wireless Dongle 2.4G Method:

- Switch Mode:** Move the power switch to the 2.4G position (Up).
- Forced Pairing:** If needed, press and hold the bottom "7" button for 3 seconds until the indicator flashes red rapidly. Then, insert the receiver into your computer's USB port.
- Success:** After a successful pairing, the red indicator stays on for 1 second before turning off.



3. Wired Mode Connection Method

- Connection:** Plug the provided Type-C data cable into the mouse and your computer.
- Automatic Switching:** The mouse will automatically default to wired mode and begin charging its internal battery simultaneously.
- Usage:** You can use the mouse normally while it is connected via cable.

⚠ When using the mouse in wired mode, we recommend switching the power to the Middle (OFF) position.

Package Contents

- LUMI G5 Tri-mode Gaming Mouse
- Magnetic Charging Dock
- USB Receiver
- Type-C Data Cable
- Instruction Manual
- Grip Tape

PRECAUTIONS:

- ⚠ Do not immerse or splash the mouse with liquid.
- ⚠ Do not use in high temperature or high humidity environments.
- ⚠ Do not place the mouse in an open flame.
- ⚠ Do not smash, crush, or disassemble the mouse.
- ⚠ Do not use a fast charging adapter to charge the mouse or the dock.